



Art. Nr.: 27516 ASG 210.3



Primary Current:	200
Secondary Current:	5
Burden (VA):	2,5
Accuracy Class:	1

Dimensions:

Round conductor in mm:	21
Width in mm:	44
Height in mm:	55,5
Depth in mm:	30


Technical Data:

Rated continuous current I_{cth} :	1.0 x IN
Rated short-time current I_{th} :	60 x IN, 1 sec.
Operating voltage U_m :	0.72 kV
Insulation test voltage:	3 kV, U_{eff} , 50 Hz, 1 min.
Rated frequency:	50 Hz
Insulation class:	E

General Technical Data:

Over-current limiting factor:	See rating plate
Working temperature range:	$-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
Storage temperature range:	$-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Unbreakable plastic housing made of black polycarbonate	Flame resistant, ultrasonically welded
Nickel-plated secondary terminals with plus-minus nickel-plated screws	M5x10mm
Custom tariff number	85043129
Applied standards 1	DIN EN 61869-1/2
Applied standards 2	DIN EN 42600-1/2

Technical Drawing:

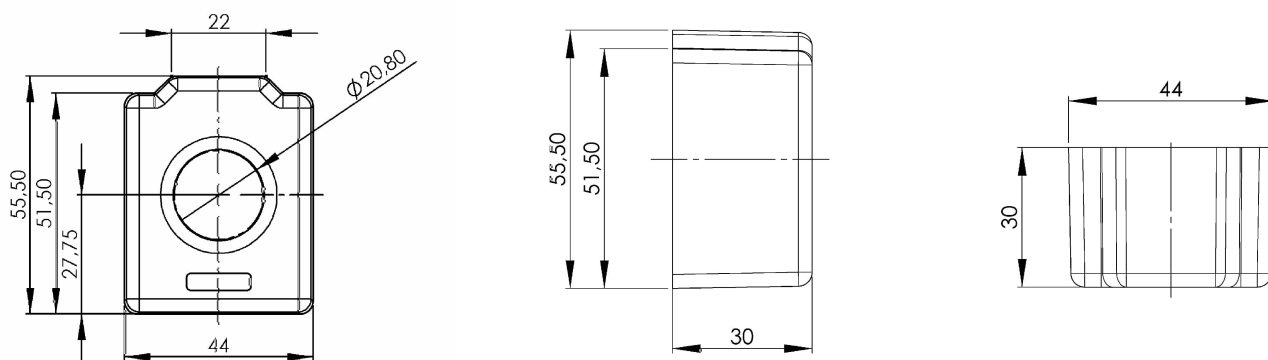

Contact:

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 10.05.2025
