



Art. Nr.: 34-0101 ASKL 31.34



Primary Current:	250
Secondary Current:	5
Burden (VA):	1,5
Accuracy Class:	1

Dimensions:

Bus bar 1 in mm:	31x12
Round conductor in mm:	18,6
Width in mm:	60
Height in mm:	63
Depth in mm:	34


Technical Data:

Therm. nominal continuous rated current I_{cth} :	$1.2 \times I_{pr}$
Therm. nominal short-time current I_{th} :	$60 \times I_{pr}$, 1 sec.
Max. operating voltage U_m :	1.2 kV
Isolation test voltage:	6 kV, U_{eff} , 50 Hz, 1 min.
Rated frequency:	50 Hz
Isolation class:	B

General Technical Data:

Over-current limiting factor:	See rating plate
Working temperature range:	$-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
Storage temperature range:	$-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Unbreakable plastic housing made of black polycarbonate	Flame resistant, ultrasonically welded
Nickel-plated secondary terminals with plus-minus nickel-plated screws	M5x10mm
Custom tariff number	85043129
Applied standards 1	DIN EN 61869-1/2
Applied standards 2	DIN EN 42600-1/2

Technical Drawing:

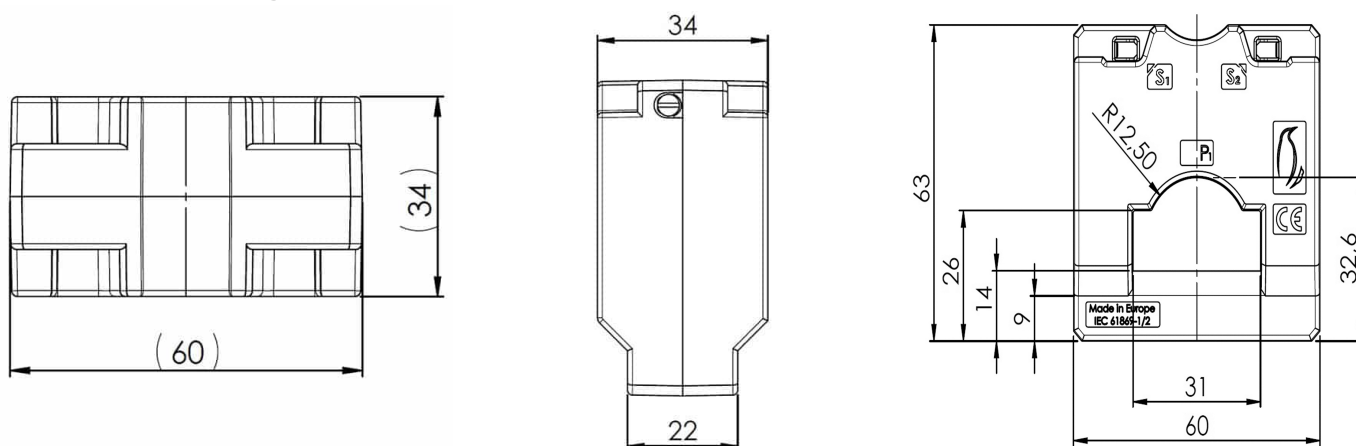

Contact:

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 15.08.2025