



Art. Nr.: 34-0102 ASKL 31.34



Primary Current:	250
Secondary Current:	5
Burden (VA):	2,5
Accuracy Class:	1

Dimensions:

Bus bar 1 in mm:	31x12
Round conductor in mm:	18,6
Width in mm:	60
Height in mm:	63
Depth in mm:	34

Technical Data:


Therm. nominal continuous rated current I_{cth} : $1.2 \times I_{pr}$
Therm. nominal short-time current I_{th} : $60 \times I_{pr}$, 1 sec.
Max. operating voltage U_m : 1.2 kV
Isolation test voltage: 6 kV, U_{eff} , 50 Hz, 1 min.
Rated frequency: 50 Hz
Isolation class: B

General Technical Data:

Over-current limiting factor:
Working temperature range:
Storage temperature range:
Unbreakable plastic housing made of black polycarbonate
Nickel-plated secondary terminals with plus-minus nickel-plated screws
Custom tariff number
Applied standards 1
Applied standards 2

See rating plate
 $-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
 $-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Flame resistant, ultrasonically welded
M5x10mm
85043129
DIN EN 61869-1/2
DIN EN 42600-1/2

Technical Drawing:

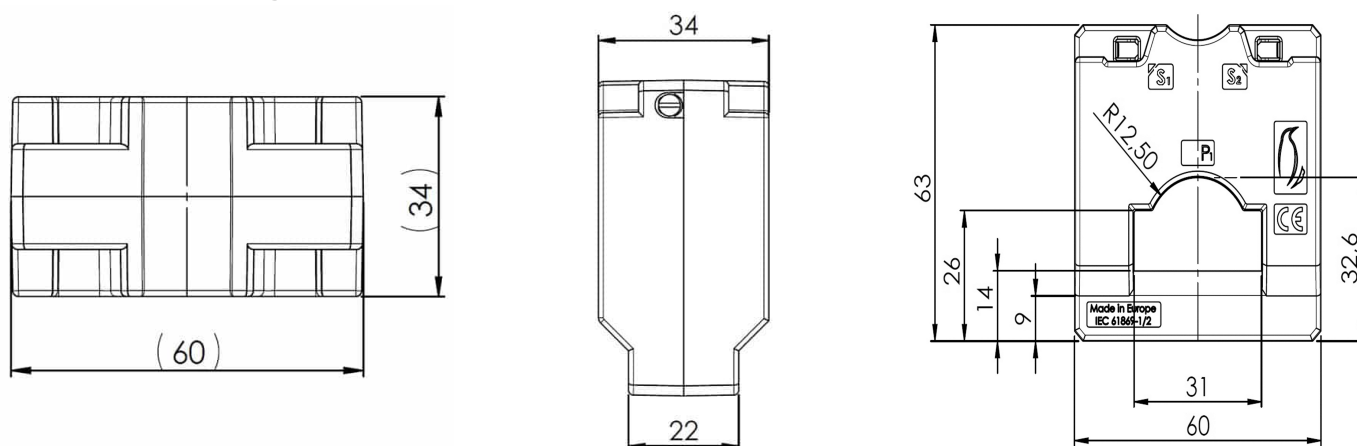

Contact:

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 19.09.2025