



## Art. Nr.: 3117 ASR 22.3 2U



|                    |         |
|--------------------|---------|
| Primary Current:   | 500-250 |
| Secondary Current: | 5       |
| Burden (VA):       | 10-5    |
| Accuracy Class:    | 1       |

### Dimensions:

|                        |      |
|------------------------|------|
| Round conductor in mm: | 22,5 |
| Width in mm:           | 60   |
| Height in mm:          | 75,5 |
| Depth in mm:           | 35   |



### Technical Data:


Therm. nominal continuous current  $I_{cth}$ :  $1,0 \times I_{pr}$   
 Therm. nominal short-time current  $I_{th}$ :  $60 \times I_{pr}$ , 1 Sek.  
 Max. operating voltage  $U_m$ : 0,72 kV  
 Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 Min.  
 Nominal rated frequency: 50 Hz  
 Isolation class: E

### General Technical Data:

|                                                                        |                                                 |
|------------------------------------------------------------------------|-------------------------------------------------|
| Over-current limiting factor:                                          | See rating plate                                |
| Working temperature range:                                             | $-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$  |
| Storage temperature range:                                             | $-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$ |
| Unbreakable plastic housing made of black polycarbonate                | Flame resistant, ultrasonically welded          |
| Nickel-plated secondary terminals with plus-minus nickel-plated screws | M5x10mm                                         |
| Custom tariff number                                                   | 85043129                                        |
| Applied standards 1                                                    | DIN EN 61869-1/2                                |
| Applied standards 2                                                    | DIN EN 42600-1/2                                |

### Technical Drawing:

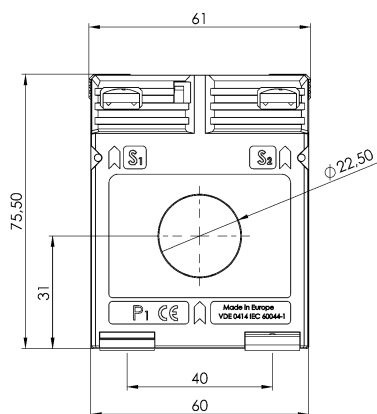

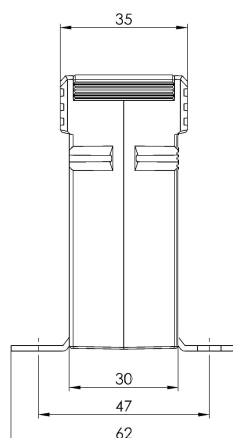

---

**Contact:**

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - [www.mbs-ag.com](http://www.mbs-ag.com)

Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - [verkauf@mbs-ag.com](mailto:verkauf@mbs-ag.com)

Date: 09.05.2025

---