



## Art. Nr.: 40327 SUSK 4



---

Primary Current:	1+1+1+1
Secondary Current:	1
Burden (VA):	10
Accuracy Class:	1

---

### Dimensions:

Width in mm:	156
Height in mm:	136,5
Depth in mm:	65

### Technical Data:

Therm. nominal continuous current  $I_{cth}$ :  $1,0 \times I_{pr}$   
Therm. nominal short-time current  $I_{th}$ :  $60 \times I_{pr}$ , 1 Sek.  
Max. operating voltage  $U_m$ : 0,72 kV  
Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 Min.  
Nominal rated frequency: 50 Hz  
Isolation class: E


---

### General Technical Data:

Over-current limiting factor:	See rating plate
Working temperature range:	$-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$
Storage temperature range:	$-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$
Unbreakable plastic housing made of black polycarbonate Nickel-plated secondary terminals with plus-minus nickel-plated screws	Flame resistant, ultrasonically welded M5x10mm
Custom tariff number	85043129
Applied standards 1	DIN EN 61869-1/2
Applied standards 2	DIN EN 42600-1/2

---

### Technical Drawing:

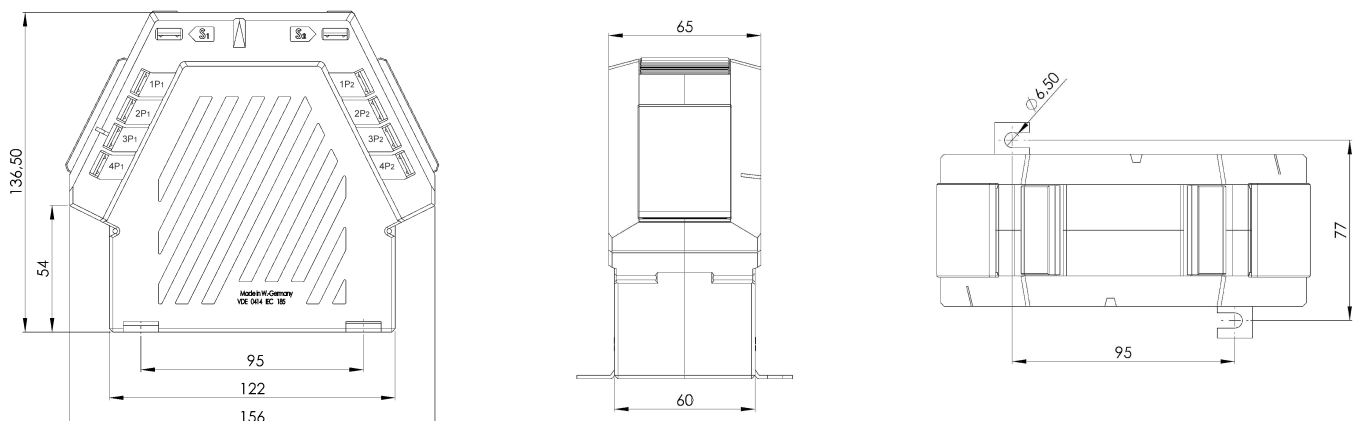

### Contact:

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - [www.mbs-ag.com](http://www.mbs-ag.com)  
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - [verkauf@mbs-ag.com](mailto:verkauf@mbs-ag.com)

Date: 02.04.2026