



Art. Nr.: 11-1006 XKBU 23



Primary Current:	400
Secondary Current:	1
Burden (VA):	5
Accuracy Class:	1

Dimensions:

Bus bar 1 in mm:	20x30
Width in mm:	93
Height in mm:	106
Depth in mm:	58

Technical Data:


Therm. nominal continuous current I_{cth} : $1 \times I_{pr}$
Therm. nominal short-time current I_{th} : $60 \times I_{pr}$, 1 Sek.
Max. operating voltage U_m : 0,72 kV
Isolation test voltage: 3 kV, U_{eff} , 50 Hz, 1 min
Nominal rated frequency: 50/60 Hz
Isolation class: E
Accuracy classes of the harmonic measurements:
Measurement accuracy up to 20 kHz:
 $\Delta\phi \leq 1^\circ$ @ 0,05-20 kHz
 $\varepsilon \leq 2\%$ @ 0,05-10 kHz
 $\varepsilon \leq 3\%$ @ 10-20 kHz

General Technical Data:

Over-current limiting factor:
Working temperature range:
Storage temperature range:
Unbreakable plastic housing made of grey polyamide:
Nickel-plated secondary terminals with plus-minus nickel-plated screws
Custom tariff number
Applied standards 1
Applied standards 2

See rating plate
 $-5^\circ\text{C} < T < +50^\circ\text{C}$
 $-25^\circ\text{C} < T < +70^\circ\text{C}$
Flame resistant, ultrasonically welded
M5x10mm
85043129
DIN EN 61869-1/2
DIN EN 42600-1/2

Technical Drawing:

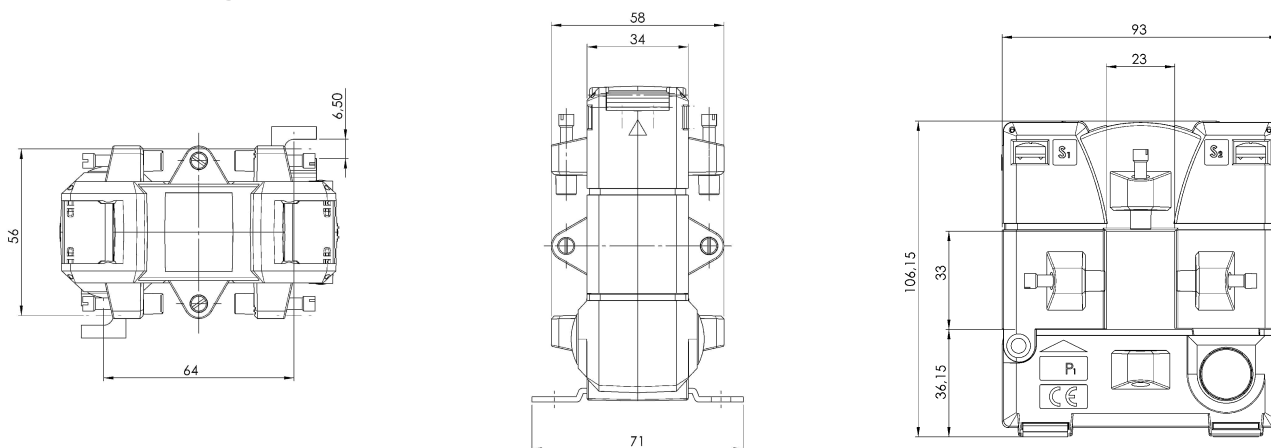

Contact:

MBS AG & Co. KG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 05.08.2025