



# Art. Nr.: ASRD 205.37 ASRD 205.37



## Dimensions:

|                        |      |
|------------------------|------|
| Bus bar 1 in mm:       | 20x5 |
| Round conductor in mm: | 18   |
| Width in mm:           | 115  |
| Height in mm:          | 65   |
| Depth in mm:           | 37   |

## Technical Data:


Therm. nominal continuous current  $I_{cth}$ :  $1,0 \times I_N$   
 Therm. nominal short-time current  $I_{th}$ :  $60 \times I_N$ , 1 Sek.  
 Max. operating voltage  $U_m$ : 0,72 kV  
 Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 Min.  
 Nominal rated frequency: 50 Hz  
 Isolation class: E

## General Technical Data:

Over-current limiting factor:  
 Working temperature range:  
 Storage temperature range:  
 Unbreakable plastic housing made of black polycarbonate  
 Nickel-plated secondary terminals with plus-minus nickel-plated screws  
 Custom tariff number  
 Applied standards 1  
 Applied standards 2  
 UL certificated:

See rating plate  
 $-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$   
 $-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$   
 Flame resistant, ultrasonically welded  
 M5x10mm  
 85043129  
 DIN EN 61869-1/2  
 DIN EN 42600-1/2  
 Certificate Number - 20100426-E336996

## Technical Drawing:

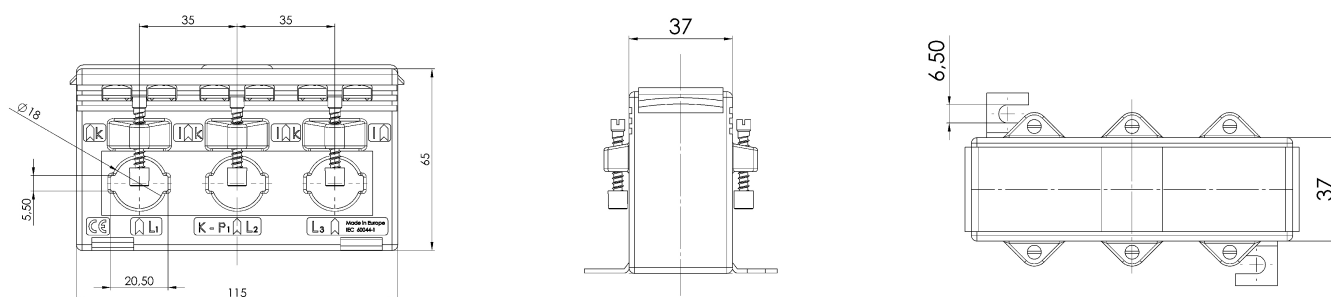

## Contact:

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - [www.mbs-ag.com](http://www.mbs-ag.com)  
 Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - [verkauf@mbs-ag.com](mailto:verkauf@mbs-ag.com)

Date: 16.05.2024