



## Art. Nr.: KBR 28 KBR 28



### Dimensions:

|                        |      |
|------------------------|------|
| Round conductor in mm: | 27,9 |
| Width in mm:           | 49   |
| Height in mm:          | 79,5 |

### Technical Data:



Therm. nominal continuous current  $I_{cth}$ :  $1,2 \times I_N$   
Therm. nominal short-time current  $I_{th}$ :  $60 \times I_N$ , 1 Sek.  
Max. operating voltage  $U_m$ : 0,72 kV  
Isolation test voltage: 3 kV,  $U_{eff}$ , 50 Hz, 1 min  
Nominal rated frequency: 50 Hz  
Isolation class: E

### General Technical Data:

Over-current limiting factor:  
Working temperature range:  
Storage temperature range:  
Unbreakable plastic housing made of grey polyamide:  
Custom tariff number  
Applied standards 1  
Applied standards 2

See rating plate  
 $-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$   
 $-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$   
Flame resistant, ultrasonically welded  
85043129  
DIN EN 61869-1/2  
DIN EN 42600-1/2

### Technical Drawing:

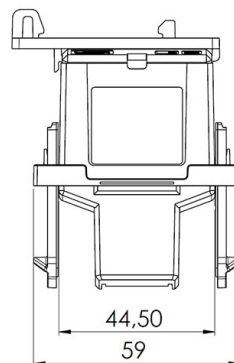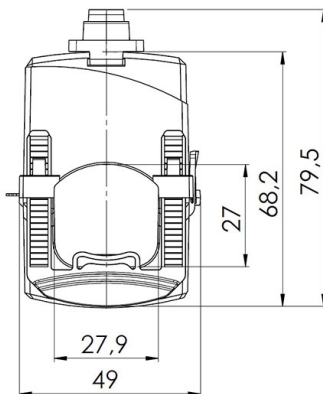

### Contact:

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - [www.mbs-ag.com](http://www.mbs-ag.com)  
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - [verkauf@mbs-ag.com](mailto:verkauf@mbs-ag.com)

Date: 02.05.2024