



## Art. Nr.: XCTB 31.35 XCTB 31.35



### Dimensions:

|                        |        |
|------------------------|--------|
| Bus bar 1 in mm:       | 30x10  |
| Bus bar 2 in mm:       | 2x20x5 |
| Round conductor in mm: | 26     |
| Width in mm:           | 61     |
| Height in mm:          | 81     |
| Depth in mm:           | 53     |






### Technical Data:

|                                               |                                |
|-----------------------------------------------|--------------------------------|
| Therm. nominal continuous current $I_{ctn}$ : | $1.2 \times I_{pr}$            |
| Therm. nominal short-time current $I_{th}$ :  | $60 \times I_{pr}$ 1 s         |
| Max. operating voltage $U_m$ :                | 1,2 kV                         |
| Isolation test voltage:                       | 6 kV, $U_{eff}$ , 50 Hz, 1 min |
| Lightning impulse voltage:                    | 12 kV, 1.2/50 $\mu$ s          |
| Nominal rated frequency:                      | 50/60 Hz                       |
| Isolation class:                              | E                              |

### General Technical Data:

|                               |                                                 |
|-------------------------------|-------------------------------------------------|
| Over-current limiting factor: | See rating plate                                |
| Working temperature range:    | $-5^{\circ}\text{C} < T < +50^{\circ}\text{C}$  |
| Storage temperature range:    | $-25^{\circ}\text{C} < T < +70^{\circ}\text{C}$ |
| Custom tariff number          | 85043129                                        |
| Applied standards 1           | DIN EN 61869-1/2                                |
| Applied standards 2           | DIN EN 42600-1/2                                |

### Technical Drawing:

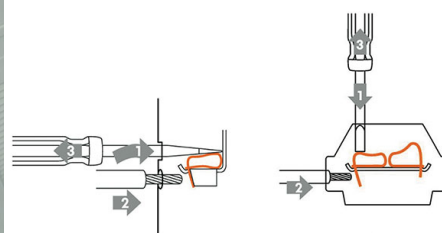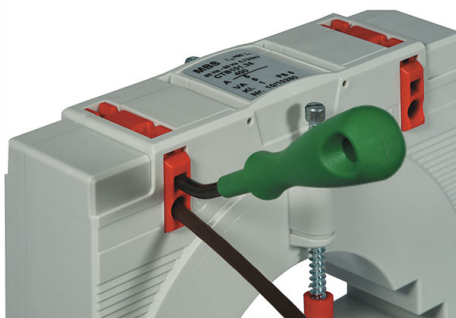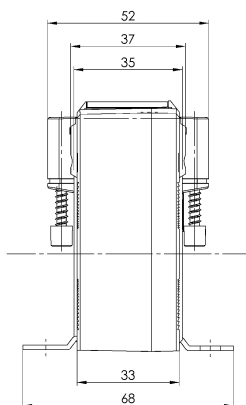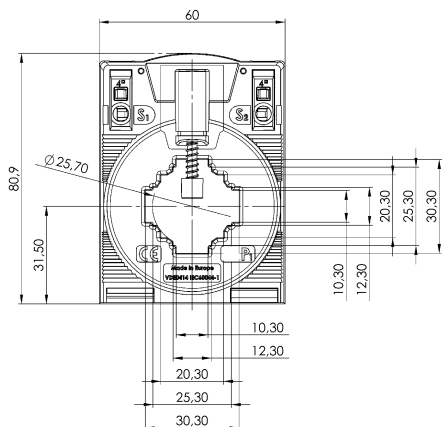



**Contact:**

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - [www.mbs-ag.com](http://www.mbs-ag.com)  
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - [verkauf@mbs-ag.com](mailto:verkauf@mbs-ag.com)

Date: 28.04.2024