



Art. Nr.: XKBU 58 XKBU 58



Dimensions:

| | |
|------------------|-------|
| Bus bar 1 in mm: | 50x80 |
| Width in mm: | 125 |
| Height in mm: | 152 |
| Depth in mm: | 58 |


Technical Data:

| | |
|---|--------------------------------|
| Therm. nominal continuous current I_{cth} : | $1.2 \times I_{pr}$ |
| Therm. nominal short-time current I_{th} : | $60 \times I_{pr}$, 1 s |
| Max. operating voltage U_m : | 1,2 kV |
| Isolation test voltage: | 6 kV, U_{eff} , 50 Hz, 1 min |
| Lightning impulse voltage: | 12 kV, 1.2/50 μ s |
| Nominal rated frequency: | 50/60 Hz |
| Isolation class: | E |

General Technical Data:

| | |
|--|---|
| Over-current limiting factor: | See rating plate |
| Working temperature range: | $-5^\circ\text{C} < T < +50^\circ\text{C}$ |
| Storage temperature range: | $-25^\circ\text{C} < T < +70^\circ\text{C}$ |
| Unbreakable plastic housing made of grey polyamide: | Flame resistant, ultrasonically welded |
| Nickel-plated secondary terminals with plus-minus nickel-plated screws | M5x10mm |
| Custom tariff number | 85043129 |
| Applied standards 1 | DIN EN 61869-1/2 |
| Applied standards 2 | DIN EN 42600-1/2 |

Technical Drawing:

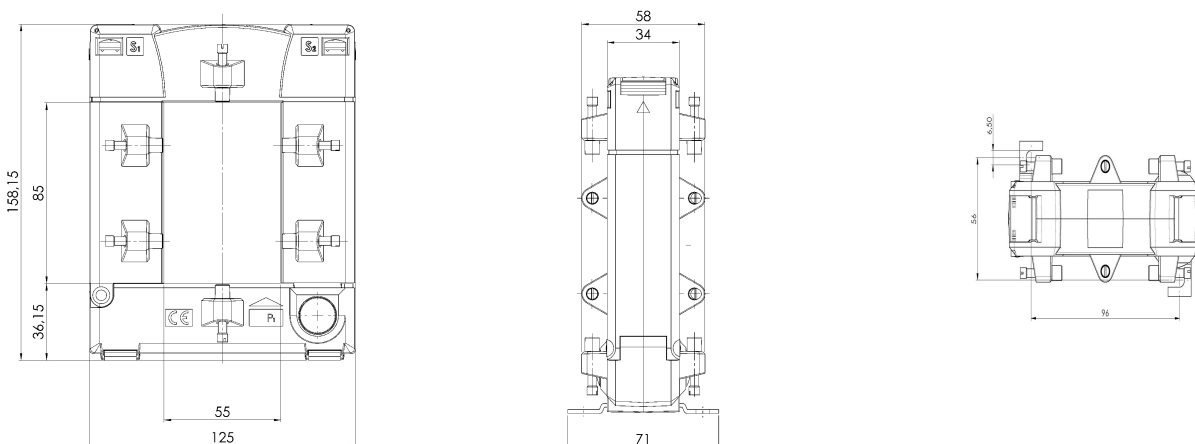

Contact:

MBS AG - Eisbachstrasse 51 - D-74429 Sulzbach-Laufen - www.mbs-ag.com
Tel.: +49 7976 9851-0 - Telefax: +49 7976 9851-90 - verkauf@mbs-ag.com

Date: 21.11.2024